## **Data Sheet**

# **RX Kit Constant Watt Cables Roof & Gutter De-icing**



# General Information



Danfoss RX constant watt heating cables provide the protection needed to prevent ice dams and snow accumulation from damaging buildings and gutters. RX cables ensure maximum energy efficiency and are designed for use with metal or asphalt roofing. Simply plug the RX cables directly to the power receptacle.

- Professional grade cable and AC plug
- 100% aluminum foil screen
- ERS (Electrical Shock Resistant)
- Tough UV-rated cable will withstand the harshest conditions
- Durable and high quality materials provide excellent moisture, corrosion and impact protection
- Two year warranty

### **Technical Data**


| Cable Construction:     | Twin conductor, constant watt     |
|-------------------------|-----------------------------------|
| Rated Voltage:          | 120V                              |
| Output:                 | 5W/ft. (16.4W/m)                  |
| Heating Element Size:   | 30 ft. to 265 ft. (9.2 to 80.8 m) |
| Bending Radius:         | Minimum 1.5 inches (38 mm)        |
| Cable Diameter:         | 1/4 inch (6 mm)                   |
| Power Lead Length:      | 6 ft. (1.82 m)                    |
| Conductor Insulation:   | Teflon™ FEP                       |
| Outer Insulation:       | PVC                               |
| Max. Temperature:       | 220°F (105°C)                     |
| Min. Installation Temp: | 40°F (5°C)                        |

# **Typical Application**

## **Product Selector for a Basic Roof**

- 1. Total length (ft.) of roof line (A) x = RL
- 2. Total length (ft.) of all down spouts (E)  $\times$  2 = DS
- 3. Add RL + DS =estimated length (ft.) of cable required

<sup>\*\*</sup>Please see manual for more complicated roof lines

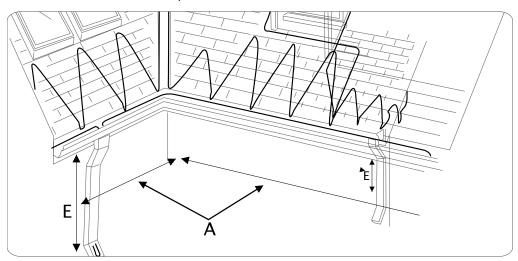



## **Ordering Information**

| Part No. | Length (ft.) | Watts | Amps | Ohms | No. of Shingle<br>Clips/Kit |
|----------|--------------|-------|------|------|-----------------------------|
| 088L3500 | 30           | 170   | 1.4  | 85.7 | 25                          |
| 088L3502 | 65           | 310   | 2.6  | 46.2 | 25                          |
| 088L3503 | 80           | 395   | 3.3  | 36.4 | 50                          |
| 088L3504 | 100          | 455   | 3.8  | 26.7 | 50                          |
| 088L3505 | 120          | 540   | 4.5  | 23.1 | 75                          |
| 088L3508 | 170          | 755   | 6.3  | 29.0 | 100                         |
| 088L3510 | 230          | 1,080 | 9.0  | 13.3 | 100                         |
| 088L3511 | 265          | 1,225 | 10.2 | 11.8 | 125                         |

Each kit also comes with 6 ft. power lead and 10 spacer clips as standard.

#### **Controls**

| Part No. | Description                                     |
|----------|---|
| 088L3036 | DS-8 Controller with Remote Snow and Ice Sensor |
| 088L3422 | Outdoor Thermostat with Water-tight Enclosure   |

#### **Accessories**

| Part No. | Description                             |  |
|----------|---|--|
| 088L0024 | RX-C Roof Clips Type A (25/bag)         |  |
| 088L3003 | RX-C Roof Clips Type B (20/bag)         |  |
| 088L3004 | RX Kit Spacer Clips, 10/bag             |  |
| 088L3005 | RX Kit Shingle Clips, 25/bag            |  |
| 088L3002 | Down Spout Edge Protection Plate, 1/bag |  |

### Warranty

Two year comprehensive extended warranty against defects in material, design, and workmanship.

# **Technical Services**

For technical questions, please contact Danfoss Heating Division North America at 1-866-676-8062. More information on Danfoss Electric Heating products is available at www.LX.Danfoss.com.

Danfoss can accept no responsibility for possible errors in catalogs, brochures, other printed materials, and website information. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alteration can be made without subsequent changes being necessary in specifications already agreed upon. All trademarks in this material are property of the respective companies. Danfoss and Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.



Toronto

Toll Free: 1-866-676-8062 Tel.: 905-285-2050 Fax: 905-285-2055

www.LX.Danfoss.com

**BRINGING WARMTH TO LIFE**