

# Wall Heater PAW Series



**Pic-A-Watt**  
Steel Fin Element



### Model Code:

PAW	12	15	-I	-RF
A	B	C	D	E
A: Wall Heater				
B: 12 - 120V 24 - 240V 20 - 208V 27 - 277V				
C: Watts (250 to 2250)				
D: Interior & Grill				
E: Right Hand Feed				



- Pic-A-Watt® Element
- Squirrel Cage Blower
- C-Frame Motor
- Patented Smart Limit Protection®
- Whisper Quiet
- Multiple wattages 250-2250
- 20 gauge powder-coated grill
- Wall can with QuickSet™ stud alignment tabs
- Standard color: white (optional almond color available)
- 120, 208, 240, or 277 Volts
- 5 Year Warranty



## The PAW Series

**The Original Multi-Watt steel fin heater and our most popular heater for single family residences** and upscale condominiums. King's exclusive Pic-A-Watt steel fin element allows customers to select from a range of wattage options, tailoring the heater to an area's specific heating requirements. Perfect for large living areas yet whisper quiet enough for bedrooms. The premium combination of an efficient high-mass steel element and whisper quiet squirrel cage blower, offers top of the class performance and years of trouble-free operation. PAW comes with five year warranty and 20+ year history of reliability. For best results use with an electronic line voltage wall thermostat. Also available with a built-in thermostat. The wall can shall be 20 gauge electro-galvanized steel and contain knockouts through which power leads are brought. The wall can shall be able to mount directly to wall studs in new or existing construction. The wall can shall be provided with QuickSet™ stud alignment tabs, used for maintaining proper depth during new installation. The wall can shall be supplied with a factory installed ground wire. Clearance: 6" to a side all, 4" from floor minimum.

### Ordering Information

MODEL	UPC	VOLTS	WATTS	AMPS	SHIP WEIGHT lbs
PAW1215	16303	120	250•500•750•1000•1250•1500	2.1-12.5	9.5
PAW2022	00512	208	500•750•1000•1250•1500•1750•2250	2.4-10.8	9.5
PAW2422	16300	240	500•750•1000•1250•1500•1750•2250	2.1-9.4	9.5
PAW2720	16302	277	1000 • 2000	3.6-7.2	9.5

### Engineering Specifications

*Contractor shall supply and install PAW Series in-wall forced-air electric heaters manufactured by King Electrical Mfg. Company, of the wattage and voltage as indicated on the plans.*

**Ratings:** Heaters shall be available in wattages of 250 to 2,250 at 120, 208, 240, or 277 Volts.

**Blower and Motor:** A whisper quiet tangential blower, delivering 75 CFM, shall be driven by a shaded pole, permanently lubricated, C-frame type motor with impedance protection and sealed bearings. Motors shall be the same voltage as the heater.

**Elements:** Element assemblies shall consist of three steel sheathed heating tubes in a furnace-brazed, plate-finned, block design. Each sheathed tube shall contain coiled Ni-Chrome wire embedded in an insulator of Magnesium Oxide. The element assembly shall provide up to seven (7) possible wattage configurations available for selection during field installation. The use of external resistors, diodes, or other weak links to obtain multiple wattages will not be acceptable.

**Thermal Overload:** Heaters shall be equipped with King's patented thermal overload Smart Limit Protection®, which disconnects elements

and motor in the event normal operating temperatures are exceeded. If thermal overload trips due to abnormal operating temperatures, thermal overload shall remain open until manually reset by turning the heater off for 15 minutes. Automatic reset of thermal overloads, which allow the element to continue to cycle under abnormal conditions, will not be accepted.

**Grill:** The grill shall be a louvered, one-piece design with rounded edges on all four sides, with rounded corners to prevent snags from contact with other materials. The grill shall be epoxy powder-coated in white or almond.

**Wall Can:** The wall can shall be 20 gauge electro-galvanized steel and shall contain a minimum of three (3) knockouts. The wall can shall have a depth gauge indicator, and a factory installed, insulated and stranded copper ground-wire. Minimum 4" clearance to floors and 6" sidewalls. Zero clearance to combustibles in the wall.





**Approvals:** cULus (E41422)

# Wall Heater PAW Series



**Pic-A-Watt**  
Steel Fin Element

## Dimensional Data

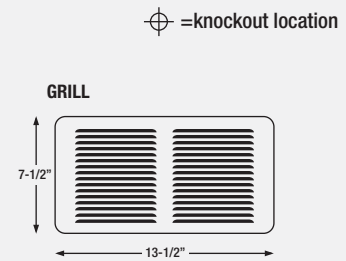

⊕ = knockout location

## Options

ADD SUFFIX	DESCRIPTION	WEIGHT lbs
-A	Almond Color	9.5
-I	Interior and Grill Only (no wall can)	7.5
-H	Interior Only (no can or grill)	7.5
-U	ULTRA GRILL Custom Bar Grill (not available with built-in thermostat)	12.0
-RF	Right Hand Feed	9.7
-SS	Stainless Steel Grill	9.6
-OGA	13" H x 13.5" W Retrofit Grill	10.0
-OGB	8.5" H x 17" W Retrofit Grill	10.0

## Accessories

MODEL	UPC	DESCRIPTION	WEIGHT lbs
PAWIC	00515	Recess Wall Can	2.5
PAWF	16319	Recess Can with Flange (remodel)	2.0
PAWS	16305	PIC-A-WATT® Surface Can - White 13.5" L x 4.5" W x 7.5" H	5.5
PAWS-A	19298	PIC-A-WATT® Surface Can - Almond 13.5" L x 4.5" W x 7.5" H	5.5
PAWG	16304	Grill - White	1.0
PAWG-ALMOND	16335	Grill - Almond	1.0
PAWG-SS	16330	Grill - Stainless Steel	1.0
PAWOG-A	00555	13" H x 13.5" W x .5" D Retrofit Grill	3.0
PAWOG-B	00560	8.5" H x 17" W x .5" D Retrofit Grill	3.0
ULTRA-W	18740	Ultra Grill - White	4.0
ULTRA-A	18745	Ultra Grill - Almond	4.0
TKIT-1BW	20654	Built-in Single Pole Single Throw Thermostat Kit, Bright White	0.5
TKIT-2BW	20655	Built-in Double Pole Single Throw Thermostat Kit, Bright White	0.5
TKIT-1	11058	Built-in Single Pole Single Throw Thermostat Kit, Almond	0.5
TKIT-2	11059	Built-in Double Pole Single Throw Thermostat Kit, Almond	0.5

### MINIMUM CLEARANCE

Zero clearance to insulation 4" above floor 6" from adjacent wall



## PAW ULTRA

Upgrade any PAW series heater with the ultra grill. Its sleek and modern design compliments more luxurious spaces.




# Wall Heater PAW Series



**Pic-A-Watt**  
Steel Fin Element

## Options & Accessories

Exploded view

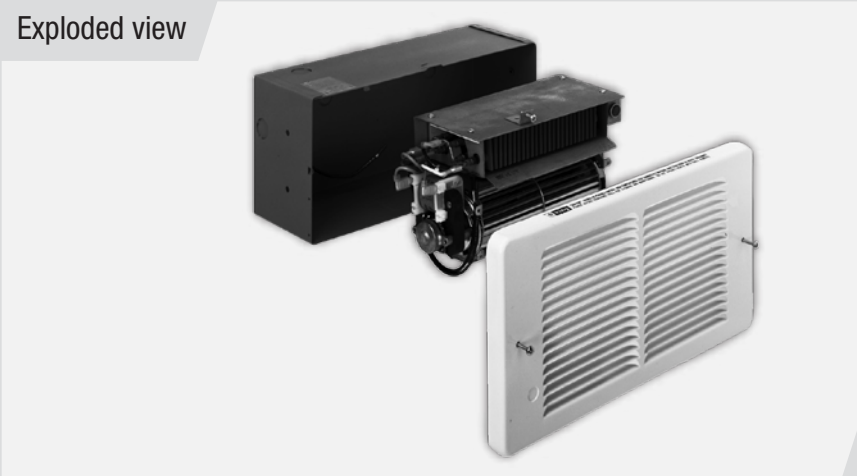

PAWS

Surface Wall Enclosure



13.5" L x 4.5" W x 7.5" H

PAWOG-B

Oversize Grill



8.5" H x 17" W

PAWG-SS

Stainless Steel



7.125" H x 13.625" W

PAWOG-A

Oversize Grill



13" H x 13.5" W

ULTRA Grill



7.25" H x 15.875" W

TKIT Thermostat For Wall Heaters

