

## COMMERCIAL FAN-FORCED WALL HEATERS

# LFK SERIES



### APPLICATIONS:

Attics  
Basements  
Entryways  
Large Rooms  
Offices  
Remodels

#### CONTEMPORARY DESIGN

- Commercial grade steel grille designed to provide a sleek appearance and rugged use

#### UNIFORM DISTRIBUTION OF WARMTH

- Built-in fan delay switch energizes fan motor only after elements are heated, which prevents discharge of unheated air
- Integral double pole thermostat allows for easy adjustment of room temperature to maintain desired comfort level and a positive OFF to assure heater will not operate if not needed

#### SAFETY STANDARDS COMPLIANT


- Safety listed by Intertek (ETL) for use in the USA and Canada complying with ANSI/UL2021 and C22.2, NO. 56 Safety Standards
- Manual-reset thermal overheat protector disconnects power in the event of overheating due to accidental blockage

#### DURABILITY AND EASY MAINTENANCE

- All units have a permanently lubricated, totally enclosed fan motor, which creates long life and low maintenance, and gently distributes warmth throughout the area

| Catalog Number | Voltage   | Wattage   | Phase | AMPS      |
|----------------|---|-----------|-------|-----------|
| LFK151F        | 120   | 1500      | 1     | 12.5      |
| LFK204F        | 240/208   | 2000/1500 | 1     | 8.3/7.2   |
| LFK303F        | 347   | 3000      | 1     | 8.6       |
| LFK304F        | 240   | 3000      | 1     | 12.5      |
| LFK306F        | 600   | 3000      | 3     | 5         |
| LFK403F        | 347   | 4000      | 1     | 11.5      |
| LFK404F        | 240/208   | 4000/3000 | 1     | 16.7/14.4 |
| LFK406F        | 600   | 4000      | 3     | 6.7       |
| LFK408F        | 208   | 4000      | 1     | 19.2      |
| LFK483F        | 347   | 4800      | 1     | 13.8      |
| LFK484F        | 240/208   | 4800/3600 | 1     | 20/17.3   |
| LFK486F        | 600   | 4800      | 3     | 8         |
| LFK4083F       | 208   | 4000      | 3     | 11.1      |
| LFK487F        | 277/240   | 4800/3600 | 1     | 17.3/15   |
| LFK488F        | 208   | 4800      | 1     | 23.1      |
| LFK4883F       | 208   | 4800      | 3     | 13.3      |
| Accessories    |   |           |       |           |
| LFKSM          | Surface mounting frame for surface installations. 3-13/16" deep |           |       |           |
| LFKS1          | 1" deep surface mounting frame for semi-recessed installation   |           |       |           |
| LFKS2          | 2" deep surface mounting frame for semi-recessed installation   |           |       |           |
| LFKSFC         | 14 gauge security front cover                                   |           |       |           |

## DIMENSIONS

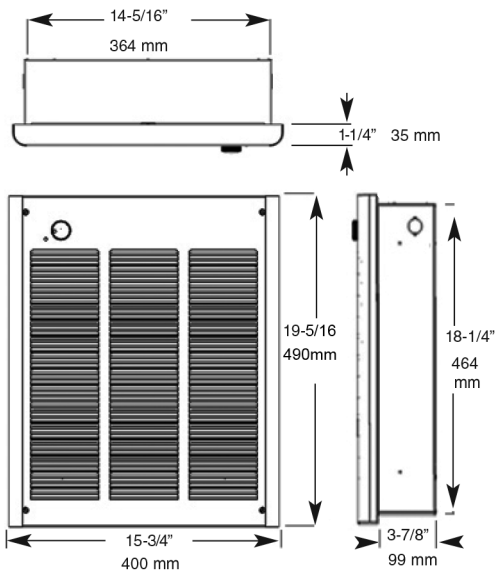

## MOUNTING LIMITATIONS

Do not install heater closer than 8" from floor or adjacent wall surface, behind towel rack or door, upside down or side up, in floor, ceiling or closet.



Conforms to ANSI/UL2021 and CSA C22.2, No. 58